


TAMEit – Hydraulic Hose Control

(P/ N MP310 for 3/8" Hoses; P/N MP320 for 1/2" Hoses)

Thank you for purchasing the TAMEit hydraulic hose control system to protect your hydraulic hoses from pinching, over-stretching, and rupture.

Check to be sure all parts are included in your kit:

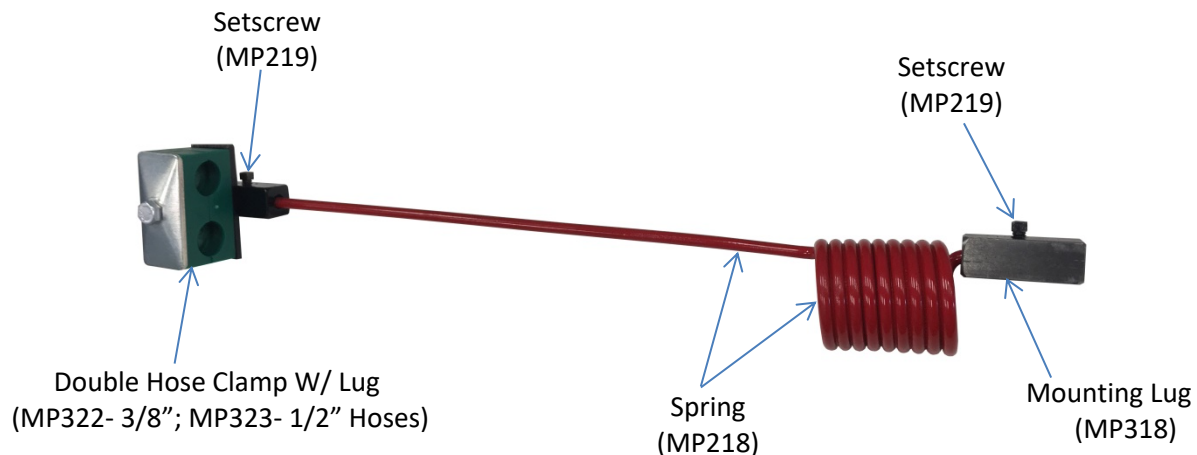

Temporarily assemble the unit as shown above. Temporarily clamp the TAMEit vertically in a location on your attachment where the TAMEit will lift the hoses up to clear any pinch points, yet it will flex to allow the attachment to be fully tilted forward without over-stretching the hoses. Test the location by clamping the hoses into the hose clamp, then tilting the attachment through the entire range of motion, making sure the hoses are not over-stretched and they are held out of harm's way. The Mounting Lug may be welded to the side or top of a structural member of the attachment. If you don't have a welder, an optional plate with mounting lug is available that can be screwed or bolted onto the attachment.



SIDE-MOUNTED LUG



TOP-MOUNTED LUG



OPTIONAL BOLT-ON MOUNTING LUG
(MP232)