
EST. F/S 1990 MANUFACTURING

UTV SPRAYERS



FSDAK-60-EC

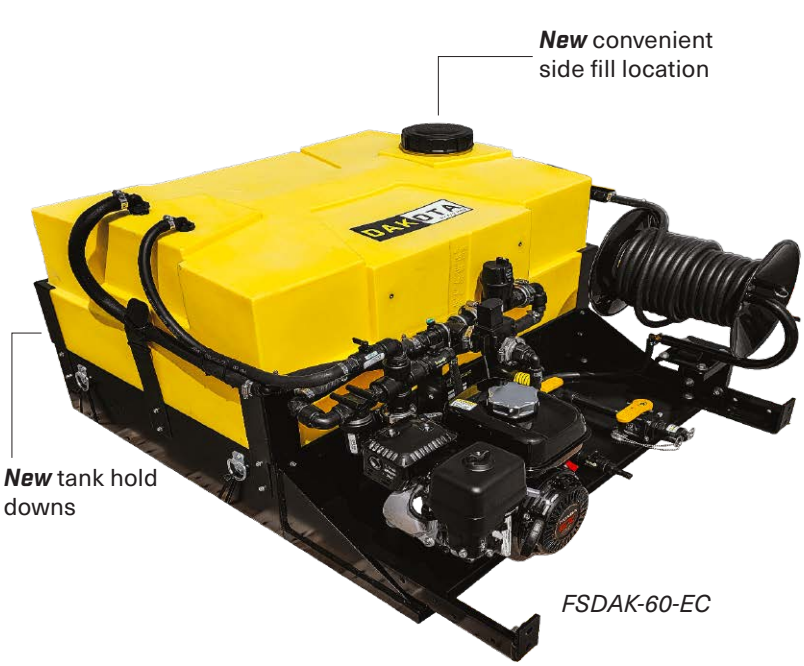

FSDAK-60-EC-3KZ

✓ LOW PROFILE TANK

Tru-Kleen low profile full drain tank maximizes your liquid carrying capacity while minimizing problems linked to high center of gravity conditions.

✓ SPOT SPRAYING

Spray wand & hose reel with 50 ft of ⅜ hose come standard so you can spot spray when or where boom spraying is not an option.

✓ ADJUSTABLE BOOM

The heavy duty adjustable boom mounting system allows you to set the right nozzle height for any application.

✓ QUALITY PARTS

All F/S sprayers are built using commercial quality valves and fittings that are made in the U.S.A.

FSDAK-60

DAKOTA BY F/S MFG

SPECIFICATIONS	FSDAK-60-EC	FSDAK-60-EC-*KZ	FSDAK-60	FSDAK-60-E
Capacity	60 Gallons	60 Gallons	60 Gallons	60 Gallons
W x L x H	38 x 42 x 25	38 x 42 x 26	38 x 42 x 25	38 x 42 x 25
Weight (Empty/Full)	160lbs/640lbs	170lbs/650lbs	170lbs/650lbs	150lbs/630lbs
Controls	1 Sect. Banjo Valve with Texas Industrial Controller	*2-5 Sect. KZ Valve Electric Control with 744A TeeJet Controller	Manual TeeJet Shutoff & Regulating Valves	Manual TeeJet Shutoff & Regulating Valves
Motor	Honda GX Series Engine	Honda GX Series Engine	Honda GX Series Engine	
Pump	Ace Centrifugal Pump [57PSI-22.5GPM]	Ace Centrifugal Pump [57PSI-22.5GPM]	Ace Centrifugal Pump [57PSI-22.5GPM]	12V Electric Pump [100 Max PSI-7GPM]





